


A-C® and ACumist® Performance Additives for Coil Coatings

A variety of A-C® and ACumist® performance additives are used in coating formulations for pre-painted metal. These additives are used to modify the paint's coefficient of friction and to increase its scratch resistance, and are ideal for metal coil processing and downstream fabrication.

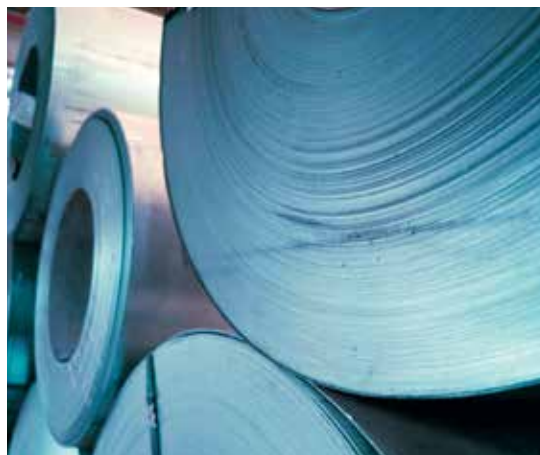

ACumist Micronized Polyolefin Additives

Application	Recommended ACumist Grades	Benefits
Primers	Water: ACumist A oxidized high-density polyethylene Solvent: ACumist A and ACumist B polyethylene homopolymer	<ul style="list-style-type: none"> • Slip control • Top coat receptive • Improves surface hardness and scratch resistance
Topcoats	Water: ACumist A oxidized high-density polyethylene Solvent: ACumist A and ACumist B polyethylene homopolymer	<ul style="list-style-type: none"> • Gloss control • Slip control prevents coil from collapsing • Improves surface resistance to water spotting from water quench • Improves scratch and block resistance
Anti-skid applications	Water: ACumist P10 polypropylene homopolymer Solvent: ACumist P5 polypropylene homopolymer	<ul style="list-style-type: none"> • Increased anti-slip or non-skid surface properties • Increased surface scratch resistance

A-C® Polyolefin Additives

Application	Recommended A-C Grades	Benefits	Incorporation Method
Primers and backers	Solvent: A-C 9 polyethylene homopolymer A-C 820 polyethylene homopolymer	<ul style="list-style-type: none"> Controlled coefficient of friction Top-coat receptive Improved scratch resistance 	<ul style="list-style-type: none"> Added as additive-solvent dispersions after media milled to suitable particle size
	Water-only applications: A-C 330 high-density oxidized polyethylene	<ul style="list-style-type: none"> Controlled coefficient of friction Improved scratch resistance 	<ul style="list-style-type: none"> Water emulsion
Topcoats	Solvent: A-C 9 polyethylene homopolymer A-C 820 polyethylene homopolymer A-C 392 high-density oxidized polyethylene	<ul style="list-style-type: none"> Controlled coefficient of friction Improved scratch resistance Blocking resistance 	<ul style="list-style-type: none"> Added as additivesolvent dispersions after media milled to suitable particle size
	Water-only applications: A-C 316 high-density oxidized polyethylene A-C 330 high-density oxidized polyethylene A-C 392 high-density oxidized polyethylene A-C 907 maleated polypropylene	<ul style="list-style-type: none"> Slip and scratch resistance 	<ul style="list-style-type: none"> Water emulsion

For additional information or to contact us , please visit:
honeywell-additives.com

All statements and information provided herein are believed to be accurate and reliable, but are presented without guarantee, warranty or responsibility of any kind, express or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement, and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated herein, or that other measures may not be required. User assumes all liability for use of the information and results obtained.



A-C and ACumist are registered trademarks of Honeywell International Inc.

2143 PA | November 2017
 ©2017 Honeywell International Inc. All rights reserved

Honeywell